



FUJIK 寿
BATTERIES

All automotive and power backup solutions

VISION

A customer trust winning company believes in quality products through continuous Research & Development ensuring sustainable returns to stakeholders.

CORE VALUES

- Integrity & Credibility
- Sense of Ownership
- Speak from the Heart
- Environment Friendly
- Honesty & Accountability
- Motivation & Team Work
- Innovative Thinking

INTRODUCTION

As an ISO 9001, ISO 14001 & ISO 45001 certified company, leading manufacturer & exporters of automotive & specialized batteries in Pakistan since 1989. We have been producing various types of automotive and inverter batteries, under the brand name of FUJIKA batteries by ACM Group of Industries. This was initially done with technical support from Chloride Industrial Batteries Limited, UK. Our Facility is equipped with experienced and skilled professionals to ensure optimum quality of our product. We are committed to continuous improvement, bringing superior performance batteries to meet the needs of our customers. It is the customer's satisfaction and confidence, supported by hardwork of our team which leads to our jubilant success.

Employees:	4000+
Product Standards:	Japanese Industrial Standards (JIS) Deutsches Institut für Normung (DIN) International Electro-Technical Commission (IEC) European standard (EN) Pakistan Standard Quality Control Authority (PSQCA)

Battery Products:

• Lithium-Ion (LiFePO ₄) Batteries:	12.8 Volt to 51.2 Volt
• Maintenance Free Calcium ⁺ Batteries:	20AH to 150AH
• Lead Acid Dry Charged Batteries:	20AH to 220AH
• Motorcycle Batteries:	3AH to 28AH
• Golf Cart Batteries:	160AH to 225AH
• Traction Cell/Batteries:	100AH to 1000AH
• Tubular Flooded Deep Cycle Batteries:	35AH to 280AH
• Valve Regulated Lead Acid Batteries (VRLA 12V):	4AH to 200AH
• OPzS/OPzV Batteries (2V):	150AH to 3000AH



MAIN MARKETS

LOCAL

ACM Group of Industries is present all over the Pakistan, having nine Regional offices and Customer Care Centres (Karachi, Lahore, Islamabad/Rawalpindi, Faisalabad, Multan, Hyderabad, Sukkur, Peshawar & Quetta) to ensure maximum coverage throughout the country.

EXPORTS

More than 29 countries around the world. (UAE, Saudi Arabia, Turkey, Qatar, China, Spain, France, Singapore, Afghanistan, Bahrain, Djibouti, Iraq, Jordan, Kuwait, Lebanon, Libya, Madagascar, Maldives, Mauritius, Nepal, Nigeria, Oman, Sri Lanka, Sudan, Syria, Tajikistan, Tanzania, Togo, Africa, and Yemen)

ACCREDITATION

- Quality Management Certification ISO 9001:2015
- Environment Management System ISO 14001:2015
- Occupational Health & Safety Management System ISO 45001:2018
- QA International UKAS (UK)
- IEC by CNC (Conformity 'n Compliance Services Nordheim Germany)
- Pakistan Standard Quality Control Authority (PSQCA)
- Maintenance Free Batteries collaboration with Duralife Daramic, USA

ISO Certified



USA

A white sports car with red racing stripes is shown in a dark, futuristic setting with red vertical light beams. In the foreground, a black Fujika battery is prominently displayed. The battery has a red top and a blue terminal, and features the Fujika logo and 'MAINTENANCE FREE BATTERY' text. The car's headlights are on, and the overall scene is lit with dramatic, low-key lighting.

MAINTENANCE FREE CALCIUM⁺ AUTOMOTIVE BATTERIES

Fujika Batteries remains consistently ahead of market trends by introducing innovative and advanced energy solutions tailored to evolving customer needs. Its maintenance-free battery concept is specifically engineered to minimize the internal evaporation process, eliminating the need for periodic water addition. Unlike conventional dry charged batteries, these batteries require no routine maintenance checks, offering greater convenience, reduced operational effort, and enhanced reliability. This advanced design ensures long-lasting performance while providing users with a hassle-free and efficient power solution.

FJ MF CALCIUM PLUS, AUTOMOTIVE BATTERIES (JIS STANDARD)


Battery Box Size	Battery Type	Plates per Cell	Capacity @ 20HR (AH)	RCT Min	CCA Amp	Dimension (mm)				Weight Wet (Kg) ±3%	Layout	Terminal	Hold Down
						L	W	H	TH				
NS40	FJ MF50G	5	20	18	180	198	126	198	222	7.90	0	A	B0
	FJ MF60R	9	38	45	350	198	126	198	222	9.85	0	A	B0
	FJ MF60L	9	38	45	350	198	126	198	222	9.85	1	A	B0
	FJ MF65R	11	40	55	370	198	126	198	222	10.70	0	A	B0
	FJ MF65L	11	40	55	370	198	126	198	222	10.70	1	A	B0
N40	FJ MF70R Thick/Thin	11	48	65	410	236	128	200	224	11.70	0	A/B	B0
	FJ MF70L Thick/Thin	11	48	65	410	236	128	200	224	11.70	1	A/B	B0
	FJ MF75R Thick/Thin	12	50	70	430	236	128	200	224	12.20	1	A/B	B0
	FJ MF75L Thick/Thin	12	50	70	430	236	128	200	224	12.20	1	A/B	B0
N50	FJ MF80R	9	50	80	400	254	170	198	221	15.00	0	B	B0
	FJ MF80L	9	50	80	400	254	170	198	221	15.00	0	B	B0
	FJ MF85R	11	75	90	440	254	170	198	221	16.60	0	B	B0
	FJ MF85L	11	75	90	440	254	170	198	221	16.60	1	B	B0
55D23	FJ MF55D23R	11	75	90	440	230	173	204	220	16.50	0	B	B0
	FJ MF55D23L	11	75	90	440	230	173	204	220	16.50	1	B	B0
N70	FJ MF110R	13	80	110	550	304	171	200	220	19.30	0	B	B0
	FJ MF110L	13	80	110	550	304	171	200	220	19.30	1	B	B0
	FJ MF120R	15	90	130	575	304	171	200	220	20.60	0	B	B0
	FJ MF120L	15	90	130	575	304	171	200	220	20.60	1	B	B0

TH total height with terminal


• Terminal : "A" is "Standard" & "B" is "Small" terminal.

Note : Specifications are subject to change with or without notice.

L Polarity 0

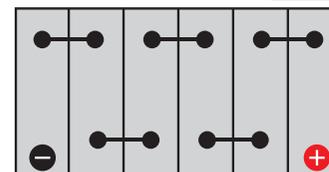

R Polarity 1

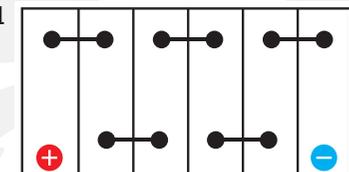

MAINTENANCE FREE CALCIUM⁺ AUTOMOTIVE BATTERIES

In today's fast-paced world, reliable and maintenance-free power sources are essential for ensuring smooth operations across various sectors. Lead-acid maintenance-free batteries, designed according to the Japanese Industrial Standards (JIS), stand out as a dependable solution for both automotive and industrial applications. These batteries combine advanced technology with robust construction, providing users with high performance and longevity without the need for regular maintenance.

FJ MF CALCIUM PLUS, AUTOMOTIVE HEAVY DUTY BATTERIES (JIS STANDARD)

Battery Box Size	Battery Type	Plates per Cell	Capacity @ 20HR (AH)	RCT Min	CCA Amp	Dimension (mm)				Weight Wet (Kg) ±3%	Layout	Terminal	Hold Down
						L	W	H	TH				
6X15	FJ MF145	15	95	100	600	365	170	202	222	24.50	1	B	B0
N100	FJ MF160	17	100	160	650	398	168	208	228	26.20	1	B	B0
N120	FJ MF200	21	125	205	750	504	182	208	234	34.10	4	B	B0
N150	FJ MF250	25	150	230	850	504	218	210	235	40.30	4	B	B0
N200	FJ MF300	33	200	420	1000	509	276	238	260	53.40	4	B	B0

TH total height with terminal

* Terminal : "B" is "Standard" terminal.

Note: Specifications are subject to change with or without notice.





MAINTENANCE FREE CALCIUM+ AUTOMOTIVE DIN STANDARD BATTERIES

Our maintenance free batteries, designed in accordance with the Deutsches Institut für Normung (DIN) German standards, offer exceptional reliability and efficiency for a wide range of applications. These batteries are renowned for their robust construction, high performance, and the convenience of being maintenance-free, making them an ideal choice for automotive and industrial use.



FJ MF CALCIUM PLUS, AUTOMOTIVE BATTERIES (DIN STANDARD)

Battery Box Size	Battery Type	Plates per Cell	Capacity @ 20HR (AH)	RCT Min	CCA Amp	Dimension (mm)				Weight Wet (Kg) ±3%	Layout	Terminal	Hold Down
						L	W	H	TH				
DIN44	FJ MF DIN 555	9	45	65	310	210	175	190	190	12.30	1	B	B13
DIN55	FJ MF DIN 666	11	60	85	390	245	175	190	190	14.30	1	B	B13
DIN66	FJ MF DIN 777	13	66	110	480	277	175	190	190	18.10	1	B	B13
DIN88	FJ MF DIN 1000	17	88	130	580	350	175	190	190	21.70	1	B	B13

TH total height with terminal

* Terminal : "B" is "Standard" terminal.

Note : Specifications are subject to change with or without notice.

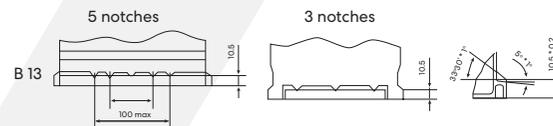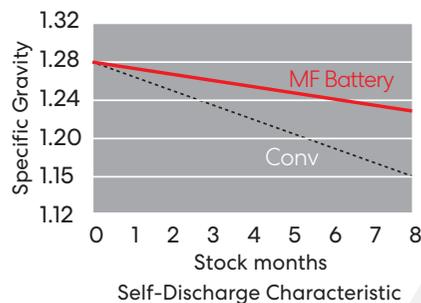


Charge Indicators

Each MF battery is equipped with indicator which shows charging conditions.



Terminal Types

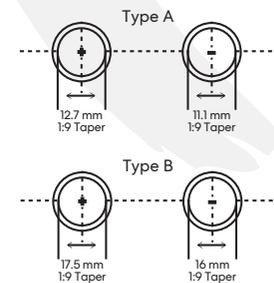

TUBULAR PLATE DEEP CYCLE BATTERIES

Fujika Flooded Tubular Deep Cycle Lead-Acid Batteries are engineered to deliver consistent and reliable power over extended periods, making them ideal for applications that require long-duration energy storage. Built with robust tubular plates and advanced lead-acid technology, these batteries provide superior deep discharge capability, excellent cyclic performance, and a longer service life compared to conventional batteries. They are particularly well suited for renewable energy systems, backup power solutions, and industrial applications where durability and reliability are critical.



DEEP CYCLE TUBULAR SERIES

Range & Specifications

Battery Type		Battery Box Size	No. of plate/cell	Rated Capacity @ 25 *C	Dimensions (mm)				Wet Weight ±3% (Kg)
				20 HR	L	W	H	Ht	
Small Tubular	FJT-700	N50	3	50	257	170	204	242	14
	FJT-1000	N70	5	78	300	170	204	242	20
Jumbo Tubular	FJT-1200	6X15	7	125	345	175	265	295	38
Jumbo Tubular	FJT-1600	N150	9	150	506	220	245	295	49
Low Height Tubular	FJLT-1500	Low Height	5	140	500	190	328	364	48
	FJLT-1700		7	170	500	190	328	364	54
	FJLT-2000		9	230	500	190	328	364	61
Premium Tall Tubular	FJT-1800	Tall Tubular	5	185	500	190	373	410	52
	FJT-2000		6	200	500	190	373	410	57
	FJT-2500		7	250	500	190	373	410	60
	FJT-3500		9	280	500	190	373	410	68
Jumbo Tall Tubular	FJT-4000	JTT	9	330	545	220	370	407	76

Features

- Tubular Positive Plates & Thick Negative Plates are used for giving longer life to the Batteries.
- Better Electrical Performance due to low Electrical Resistance PE Separators and prevents oxidation.
- Float Indicators are fitted to determine the level of Electrolyte.
- Designed to have life of over 1250 Cycles at 80 % DOD.

Applications

- UPS/Inverters
- Telecommunication System
- Wind and Solar Energy
- Security & Surveillance Systems
- Electronic PABX System
- Office Automation Equipment
- Process Instrumental and control
- Emergency Lighting

Standards

Test Standards	Quality Standards
IEC 60896-11	ISO 9001
	ISO 14001
	ISO 45001



LITHIUM BATTERIES

RECHARGEABLE LI-ION BATTERY (LIFEPO₄)

The Lithium LiFePO₄ (LFP) battery offers significant weight reduction, high energy capacity, and stable voltage performance even under extreme load conditions. Specifically engineered to meet the demanding requirements of modern energy storage systems, this battery ensures exceptional safety, reliability, and long service life. Its advanced chemistry guarantees an extended cycle lifespan, even with regular deep discharges, making it a highly efficient and dependable solution for a wide range of applications.

RECHARGEABLE LITHIUM BATTERY

Range & Specifications

Nomenclature	Capacity (AH)	Nominal Voltage	Dimension (mm)			Weight	IP Rating
			L	W	H		
FJ-LFP51314	314	51.2	552	299.5	862	130.00	IP 65
FJ-LFP51205W	205	51.2	680	480	250	93.00	IP 65
FJ-LFP51100W	100	51.2	520	141.5	471	47.20	IP 65
FJ-LFP48100R	100	48	440	450	133	46.00	IP 20
FJ-LFP25100W	100	25.6	395	150	587	28.00	IP 20
FJ-LFP25100	100	25.6	532	206	215	24.00	IP 55
FJ-LFP12200	200	12.8	522	238	218	27.00	IP 55
FJ-LFP12150	150	12.8	483	170	240	19.20	IP 55
FJ-LFP12100	100	12.8	328	172	215	13.10	IP 55
FJ-LFP1260	60	12.8	229	138	210	6.70	IP 55

Features:

- * Built-in intelligent BMS with charge/discharge current limitations
- * Automatic protection for overcharge/discharge and temperature conditions
- * Compatible with standard rectifiers/inverters/UPS
- * High reliability design
- * Excellent battery life

Applications:

- Solar Energy Storage System
- UPS/Inverter
- Telecom Sites
- IT/Data Centres
- Commercial and Industrial Applications

- A powerful smart rechargeable LiFePO₄ intelligent energy storage unit, especially designed to provide Power Backup for Telecom Sites, IT/Data Centers and Solar Energy Storage Systems. Its design enables parallel installation to meet extended power backups.
- Wall mounted Household Energy Storage System with a sleek and space-saving solution for your energy storage needs. With its compact design and easy installation, it seamlessly blends into any environment. Whether at your Home, Office, Commercial & Industrial space, our wall-mounted unit provides reliable and efficient energy storage, empowering you to optimize energy usage and reduce waste.

Certifications

ISO 9001	IEC 62619
ISO 14001	UN 38.3
ISO 45001	




LEAD ACID DRY CHARGED AUTOMOTIVE BATTERIES

Fujika Batteries manufactures high-quality conventional lead-acid dry charged batteries, including both shallow cycle and deep cycle variants, in strict compliance with Japanese industrial standards. Designed for reliability, durability, and consistent performance, these batteries effectively cater to a wide range of applications, addressing both national and global energy requirements.




DRY CHARGED LEAD ACID BATTERIES (JIS STANDARD)


Battery Box Size	Battery Type	Plates per Cell	Capacity @ 20HR	Dimension (mm)				Weight (Kg)±3%	Layout	Terminal
				L	W	H	TH			
NS40	FJ Solar50 Plus	5	22	195	127	200	223	4.50	0	A/B
	FJ 55R	7	32	195	127	200	223	5.70	1	A/B
	FJ 55L	7	32	195	127	200	223	5.70	0	A/B
	FJ 60R	9	38	195	127	200	223	6.60	1	A/B
	FJ 60L	9	38	195	127	200	223	6.60	0	A/B
	FJ 60R Plus	9	42	195	127	200	223	6.80	0	A/B
	FJ 60L Plus	9	42	195	127	200	223	6.80	0	A/B
	FJ CR65R	11	50	195	127	200	223	8.20	1	A/B
	FJ CR65L	11	50	195	127	200	223	8.20	0	A/B
N40	FJ 70R (Thick/Thin)	11	50	232	132	202	223	8.45	1	A/B
	FJ 70L (Thick/Thin)	11	50	232	132	202	223	8.45	0	A/B
	FJ 75R (Thick/Thin)	12	50	232	132	202	223	9.20	1	A/B
	FJ 75L (Thick/Thin)	12	50	232	132	202	223	9.20	0	A/B
N50	FJ 88R	9	50	257	168	202	229	9.50	1	B
	FJ 88L	9	50	257	168	202	229	9.50	0	B
	FJ 90ZR	11	60	257	168	202	229	11.10	1	B
	FJ 90ZL	11	60	257	168	202	229	11.10	0	B
	FJ 95ZR	13	70	257	168	202	229	12.65	1	B
	FJ 95ZL	13	70	257	168	202	229	12.65	0	B
	FJ Solar 90	9	50	257	168	202	229	9.50	0	B
N70	FJ Solar 100	9	55	302	170	202	227	10.30	0	B
	FJ 115R Plus A	11	72	302	170	202	227	11.90	0	B
	FJ 120R	13	80	302	170	203	227	13.05	1	B
	FJ 120L	13	80	302	170	203	227	13.05	0	B
	FJ 125ZR	15	85	302	170	203	228	14.85	1	B
	FJ 125ZL	15	85	302	170	203	228	14.85	0	B
6X15	FJ 130	13	90	367	170	203	228	13.70	0	B
	FJ 135	15	100	367	170	202	223	15.60	0	B
	FJ 145	17	105	367	170	202	223	17.10	0	B
N100	FJ 150	15	100	405	172	208	238	16.05	0	B
	FJ 155	17	110	405	172	208	238	17.50	1	B
	FJ 160	19	115	405	172	208	238	19.10	1	B
N120	FJ 180	19	120	500	178	210	238	21.00	4	B
	FJ 200	21	130	500	178	210	238	21.90	4	B
	FJ 210 Plus	21	135	500	178	210	238	23.35	4	B
	FJ 220	23	145	500	178	210	238	24.35	4	B
N150	FJ 225	21	135	502	218	210	241	24.10	4	B
	FJ 230	23	150	502	218	210	241	25.45	4	B
	FJ 240 Plus	23	155	502	218	210	241	26.00	4	B
	FJ 260	25	175	502	218	210	241	26.65	4	B
	FJ 270	27	180	502	218	210	241	27.80	4	B
N200	FJ 280	27	180	515	274	212	241	28.75	4	B
	FJ 290	31	200	515	274	212	241	32.65	4	B
	FJ 300	33	215	515	274	212	241	34.30	4	B
6TN	6TN	25	100	280	265	200	221	20.60	4	B

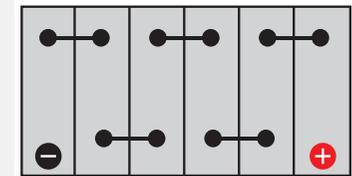


Layout 0

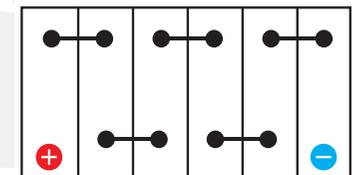

Layout 1

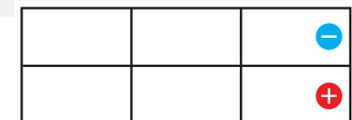

Layout 3

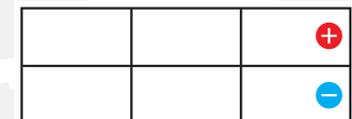

Layout 4

*TH total height with terminal



MOTORCYCLE BATTERIES

Fujika motorcycle batteries are available in both Dry Charged and VRLA (AGM/GEL) variants, offering reliable solutions to meet diverse power requirements. Renowned for their superior quality, durability, and long-lasting performance, these batteries are manufactured to deliver consistent power under demanding operating conditions. The Fujika VRLA and Dry Charged motorcycle battery range spans from 3Ah to 45Ah, making it suitable not only for motorcycles but also for a wide range of utility applications, including lawn mowers, computers, and other small equipment where dependable energy supply is essential.

MOTORCYCLE BATTERIES

VRLA (AGM) RANGE OF BATTERIES

Nomenclature	Battery Types	Plates per Cell	Capacity 10 Hr	Dimension (mm)			Weight Kg Wet ($\pm 3\%$)
				L	W	H	
Supreme4	12V 3AH	3	3	80	78	106	1.20
Supreme6	12 V 5AH	5	5	120	60	128	1.90
Supreme8	12V 7AH	7	7	148	60	130	2.70
Supreme10	12 V 9AH	7	9	135	75	140	3.50

DRY CHARGE BATTERIES

Nomenclature	Battery Types	Plates per Cell	Capacity 10 Hr	Dimension (mm)			Weight Kg Dry ($\pm 3\%$)
				L	W	H	
Super4	12V 3AH	3	3	71/80	70.5	104.3	0.80
Super6	12V 5AH	7	5	118/128	59.0	132.6	1.65
Super7	12V 6.5AH	5	6.5	140/150	67	100.6	1.40
Super8	12V 7 AH	9	7	148/157	58.0	130.1	2.10
Super10	12V 9 AH	7	9	136/144	75.0	141.6	2.57

VRLA 6-GFM SERIES SMALL BATTERIES

Features

- Suitable for E-bikes.
- High impact strength.
- In opaque ABS fire retardant container.
- Provides long life.
- Maintenance free battery with AGM technology.

Type	No. of plates	Capacity @ 20 Hr	Dimensions (mm)			Weight Kg Wet ($\pm 3\%$)	Boost Charging Current
			L	W	H		
6-GFM-18	09	18	181	76	166	5.4	3.6 Amp
6-GFM-20	09	20	180	76	169	7.3	4.0 Amp
6-GFM-22	11	22	181	76	164	6.0	4.4 Amp
6-GFM-28	15	28	166	176	126	9.5	5.6 Amp
6-GFM-45	07	45	196	165	171	13.5	9.0 Amp

NP SERIES VRLA AGM/GEL DEEP CYCLE BATTERY

Features

- Suitable for deep cycle purpose.
- High impact strength.
- No top up required.
- Provides long life.
- In opaque ABS fire retardant container.
- Completely sealed maintenance free battery with AGM technology.

Type	No. of plates	Capacity @ 20 Hr	Dimensions (mm)			Weight Kg Wet ($\pm 3\%$)	Boost Charging Current
			L	W	H		
NP5-12	05	5.0	90	70	101.5	1.65	1.0 Amp
NP7-12	07	7.2	152	65	100	2.50	1.5 Amp
NP12-12	13	12.0	151	98	93	3.50	2.4 Amp

Type	No. of plates	Capacity @ 20 Hr	Volts	Dimensions (mm)			Weight (Grm) ($\pm 3\%$)
				L	W	H	
NP4-4	5	4	4V	47.2	47.7	102.2	531.00
NP4.5-6	5	5	6V	70.0	47.2	102.4	883.00

6-DZM-26 (12V 26AH) Graphene VRLA Battery

Features

- Maintenance - Free Operation
- AGM Technology
- Reduce Charging Time and Increase Power Efficiency
- Enhanced Cycling Stability
- Excellent for use in a variety of temperature environments

Type	No. of plates	Capacity @ 20 Hr	Volts	Dimensions (mm)			Weight Kg ($\pm 3\%$)
				L	W	H	
6-DZM-26	9	26	12V	181.5	77.0	170.0	7.25



MOTIVE POWER / ELECTRICAL VEHICLE BATTERIES

Fujika also manufactures advanced deep-cycle batteries for motive-power vehicles in Pakistan, delivering reliable and efficient energy solutions for demanding applications. Customers consistently trust Fujika deep-cycle batteries for their high output, extended service life, and dependable performance, making them a preferred choice across a wide range of industries.

MOTIVE POWER BATTERIES

Nomenclature	Volts	Capacity @ 20 HRS	Over all Dimensions (mm)			Weight Kg Wet (±3%)
			L	W	TH	
8-GCF	8	160 AH	258	181	282	31.5
6-GCT	6	210 AH	260	182	282	30.5
6-GCF	6	225 AH	260	182	282	31.0

Features:

- Thick antimonial lead alloy grids for long life & increase cycle life.
- Positive & negative terminals are covered with plastic caps.
- Heavy duty PE separators for long life.
- Containers/covers made of PP material and are heat sealed.
- High paste density for reduce shedding during cycling and extending battery Life.
- Designed for increased cycle life with low maintenance.
- Special expander is used for long backup time of the battery.
- Available in 8 volt & 6 volt version.
- Available in Tubular & flat positive plate.

Applications:

- For Golf Carts
- Electric Fork Lifters
- Electric Vehicles
- Electric Floor Machinerics



TRACTION CELLS / BATTERIES

Fujika Traction batteries are designed to power battery-operated electric vehicles such as forklifts, electric golf carts, ride-on floor scrubbers, mining locomotives, and a wide range of other industrial vehicles. Our traction batteries are among the highest-quality solutions available worldwide, engineered to deliver reliable and consistent performance in demanding environments. Utilizing proprietary technology with original glass fiber tubular design, they offer a unique competitive advantage while fully meeting customer requirements for extended service life, stable and consistent quality, and ease of maintenance.

TRACTION CELL/BATTERIES

Model	Nominal Voltage	Rated Capacity (AH) 5 Hr	Overall Dimensions $\pm 2(\text{mm})$ with Acid				Approx. Weight ($\pm 5\%$ kg)
			L	W	H	TH	
50AH /Plate							
8PZB400	2V	400	141	158	384	416	23.0
70AH /Plate							
3PZB210	2V	210	61	158	485	518	12.4
100AH /Plate							
5PZB500	2V	500	93	158	659	695	27.5

Features:

- Lead acid open type batteries with liquid electrolyte base.
- Robust tubular plate vented technology.
- High density tubular positive plate design proves more power.
- The cover and container are made from high impact, temperature resistant poly propylene and heat seal welded to prevent electrolyte leakage.
- Available in both JIS & DIN, JIS is widely accepted by global forklift manufacturers for its quality. DIN is popular for tubular type with a long cycle life.

Applications:

- Electric Fork Lifters
- Electric Cleaning Machines
- Electric Tractor
- Lifting Platforms

VALVE REGULATED LEAD ACID VRLA BATTERIES

6-GFM Top Access VRLA Deep Cycle AGM Batteries are high-capacity, next-generation models developed using the latest advanced technologies. These batteries offer numerous advantages, including a safe and reliable sealing structure, high specific energy, low internal resistance, low self-discharge rate, excellent charge acceptance, extended cyclic life, and high sealing reaction efficiency. Designed for dependable performance, they provide an efficient and long-lasting energy solution for demanding deep-cycle applications.



NP/NPJ SERIES & 6-GFM/6-GFMJ SERIES

RANGE & SPECIFICATIONS

Battery Type	Nominal Voltage (V)	Rated Capacity	Terminal Type	Dimensions (mm) Tolerance ± 2			Approx. Weight Kg (± 3)
				L	W	H	
6-GFM-18	12	18AH(C20)	M5	181	76	167	5.40
6-GFM-22	12	22AH(C20)	M5	181	76	167	6.10
6-GFM-28	12	28AH(C20)	M5	167	176	126	9.50
6-GFM-40	12	40AH(C20)	F4	197	165	170	13.00
6-GFM-45	12	45AH(C20)	F4	197	165	170	13.50
6-GFM-200	12	200AH(C10)	M8	522	259	236	72.00
6-GFMJ-18	12	18AH(C20)	M5	181	76	167	5.40
6-GFMJ-22	12	22AH(C20)	M5	181	76	167	6.10
6-GFMJ-28	12	28AH(C20)	M5	167	176	126	9.50
6-GFMJ-40	12	40AH(C20)	F4	197	165	170	13.00
6-GFMJ-45	12	45AH(C20)	F4	197	165	170	14.00
6-GFMJ-200	12	200AH(C10)	M8	522	259	236	72.00

Main Technical Specifications

- No Leakage & No Acid Smog Spray during the operation
- No need to add Acid or Water
- Number of Cycles vs Depth of Discharge (DOD) @ 25°C:
20% DOD 1600, 50% DOD 1000, 80% DOD 700
- Self-Discharge is under 3% (at 25°C, 30 Days)
- Operating Temperature Range: -15°C~+55°C
- Recommended Operating Temperature: 20°C~25°C
- Recommended Float Voltage (25°C): 13.5V
- Recommended Cyclic Voltage (25°C) :14.1V
- Maximum Charging Current Limit: 0.2C₁₀
- Recommended Charging Current 0.15C₁₀
- Recombination Efficiency: >96%

Features:

- AGM & GEL Technology
- Top Access
- Rated Voltage: 12V
- Capacity Range: 4AH - 200AH
- 10 Years Design Life (25°C)
- Flame Retardant Container & Cover with ABS Material

Applications:

- UPS/Inverter
- Telecom & IT Power Backup
- Power Plants / Transmission Substation
- Security & Surveillance Systems
- Microwave Relay Station
- Auto Control Equipment
- Security System
- Electro-Medical Equipment
- Remote Sensing Devices
- Emergency Light System
- Power Supply System
- Military Facilities
- Railway Signalling
- Solar Energy Backups

Standards

Test Standards	Quality Standards
IEC 60896-21	ISO 9001
IEC 60896-22	ISO 14001
IEC 61427-1	ISO 45001



VALVE REGULATED LEAD ACID VRLA BATTERIES

6-FMX Front Access VRLA Deep Cycle AGM/GEL Batteries deliver superior performance while occupying significantly less space than conventional standby power batteries. Featuring a compact and efficient design, this series is suitable for 19-inch and 23-inch cabinets or rack systems, providing users with enhanced energy density, easy accessibility, and optimized space utilization for modern power backup applications.

6-FMX/6-FMXJ SERIES (12V)

RANGE & SPECIFICATIONS

Battery Type	Nominal Voltage (V)	Rated Capacity (C10) AH	Terminal Type	Dimensions (mm) Tolerance ± 2			Approx. Weight Kg ($\pm 3\%$)
				L	W	H	
6-FMX-75B	12	75	M6	395	110	286	26
6-FMX-100B	12	100	M6	395	110	286	32
6-FMX-120B	12	120	M6	550	110	310	42
6-FMX-150B	12	150	M6	550	110	310	49
6-FMX-150C	12	155	M6	559	125	315	52
6-FMX-180B	12	180	M6	559	125	315	57
6-FMXJ-75B	12	75	M6	395	110	286	26
6-FMXJ-100B	12	100	M6	395	110	286	32
6-FMXJ-120B	12	120	M6	550	110	310	42
6-FMXJ-150B	12	150	M6	550	110	310	49
6-FMXJ-150C	12	155	M6	559	125	315	52
6-FMXJ-180B	12	180	M6	559	125	315	58

Main Technical Specifications

- No Leakage & No Acid Smog Spray during the operation
- No Need to Add Acid or Water
- Number of Cycles vs Depth of Discharge (DOD)
@ 25°C: 20% DOD 1600, 50% DOD 1000, 80% DOD 700
- Self-Discharge is under 3% (at 25°C, 30 Days)
- Recommended Operating Temperature: 20°C~25°C
- Operating Temperature Range: -15°C~+55°C,
- Recommended Float Voltage (25°C): 2.23V
- Recommended Cyclic Voltage (25°C) :2.30V
- Maximum Charging Current Limit: 0.2C₁₀
- Recommended Charging Current 0.15C₁₀
- Recombination Efficiency: >96%

Features:

- AGM Technology
- Rated Voltage: 12V
- Capacity Range (C₁₀): 75AH - 180AH
- 10 Years Design Life (25°C)
- Front Access Terminals for Easy Installation & Maintenance
- Flame Retardant Container & Cover with ABS Material
- High Reliability & Long Service Life

Applications:

- Uninterruptible Power Supply (UPS)
- Telecom & IT Power Backup
- Security & Surveillance Systems
- Power Plants
- Transmission Substation
- Lawn & Garden Tools
- Microwave Relay Station
- Remote Sensing Device
- Emergency Light System
- Power Supply System
- Military Facilities
- Railway Signalling
- Solar Energy Backups
- Auto Control Equipment

Standards

Test Standards	Quality Standards
IEC 60896-21	ISO 9001
IEC 60896-22	ISO 14001
IEC 61427-1	ISO 45001

OPzS CELLS / BATTERIES

OPzS batteries comply with IEC 60896-11 and DIN 40736-1 standards, with a capacity range from 150Ah to 3000Ah. The OPzS Series is specifically engineered for regular and prolonged deep discharge applications, making it ideal for renewable energy systems such as solar and wind power, as well as off-grid installations. Manufactured using an optimized low-antimony alloy, these batteries offer a very long expected service life, excellent discharge cycle stability, and outstanding medium- to long-rate discharge performance, supported by their robust tubular plate design. The series is particularly suitable for high-capacity applications in areas with unstable grids or unreliable power supply. For standby applications, the OPzS Series is designed to deliver a service life of approximately 18–20 years.



OPZS SERIES (2V)

RANGE & SPECIFICATIONS:

Battery Type	Nominal Voltage (V)	Rated Capacity (C10) 1.80V/Cell	Terminal Type	Dimensions (mm) Tolerance + 2				Approx. Weight Kg (±3%)
				L	W	H	TH	
OPzS 150	2	150	M8	103	206	356	410	15
OPzS 200	2	200	M8	103	206	356	410	17
OPzS 250	2	250	M8	145	206	356	410	22
OPzS 300	2	300	M8	145	206	356	410	24
OPzS 600	2	600	M8	145	206	646	702	47
OPzS 800	2	800	M8	191	210	646	702	65
OPzS 1000	2	1000	M8	233	210	646	702	82
OPzS 1200	2	1200	M8	275	210	646	702	92
OPzS 1600	2	1600	M8	397	212	773	828	143
OPzS 3000	2	3000	M8	576	212	775	833	223

Features:

- Rated Voltage: 2V
- Tubular Positive Plates with special Low Antimony Lead alloy
- Reduced Water Loss
- Excellent Cycling Even in Partial Discharge State
- Additional Electrolyte to Reduce Topping Up
- Ceramic Plug Filter
- Installation in Vertical Position
- Long Service Life
- Capacity Range (C₁₀) 2V: 150AH~3000AH
- 20 Years Design Life (25°C)
- Flame Retardant Container & Cover with ABS Material
- High Reliability & Long Service Life

Applications:

- Telecommunication/IT
- Traffic Systems (Signalling & Lighting)
- Mobile Phone Station
- Drinking Water Supply System
- Security Lighting
- Power Plants
- Industrial Control
- Electro Medical Systems
- Solar & Wind Energy Storage etc.

Standards

Test Standards	Quality Standards
IEC 60896-11	ISO 9001
	ISO 14001
	ISO 45001

OPzV CELLS / BATTERIES

The OPzV series is a Valve-Regulated Lead-Acid (VRLA) battery that utilizes immobilized GEL and tubular plate technology, delivering high reliability and stable performance. Designed and manufactured in accordance with DIN standards, the series features a die-cast positive grid and a patented active material formula, surpassing standard DIN specifications. This makes the OPzV series particularly well-suited for cyclic applications under extreme operating conditions, ensuring long-lasting and dependable energy performance.



OPZV SERIES (2V)

RANGE & SPECIFICATIONS:

Battery Type	Nominal Voltage (V)	Rated Capacity (C10) 1.80V per Cell	Terminal Type	Dimensions (mm) Tolerance ± 2				Approx. Weight Kg ($\pm 3\%$)
				L	W	H	TH	
OPzV200	2	200	F28	103	206	356	391	18
OPzV300	2	300	F28	145	206	356	391	25
OPzV420	2	420	F28	145	206	471	506	35
OPzV600	2	600	F28	145	206	646	681	44.5
OPzV800	2	800	F28	191	210	646	681	64
OPzV1000	2	1000	F28	233	210	646	681	78
OPzV1500	2	1500	F28	275	210	795	830	115
OPzV2000	2	2000	F28	399	214	775	810	154
OPzV3000	2	3000	F28	576	212	775	810	215

Features:

- 2 Volts
- Tubular Positive Plates, Pressure Cast from Led-Calcium Alloy
- Electrolyte Immobilized in Gel Structure
- Excellent Cycling Even in Partial Discharge State
- Standard ABS Plastic
- Installation in Vertical or Horizontal Position
- Long Service Life

Applications:

- Telecommunication/IT
- Solar & Wind Energy Storage
- Traffic Systems (Signalling & Lighting)
- Mobile Phone Station
- Drinking Water Supply System
- Security Lighting
- Power Storage Plants
- Industrial Control
- Electro Medical Systems

Standards

Test Standards	Quality Standards
IEC 60896-21	ISO 9001
IEC 60896-22	ISO 14001
IEC 61427-1	ISO 45001



HEADQUARTER:

House # 2, Street # 63, Sector F-8/4, Islamabad - Pakistan. Tel: +92-51-111-22-00-22

UAE Office:

Office # 327, Floor 27, Al Saqr Business Tower, Sheikh Zayed Road, Dubai, U.A.E.

Tel: +971-5-8109-7958

FOR QUERIES:

acmgroup.com.pk